Metron Hydration Extension Mount Installation Instructions

Published – Nov, 2026. ZS182A.v1 © Full Speed Ahead

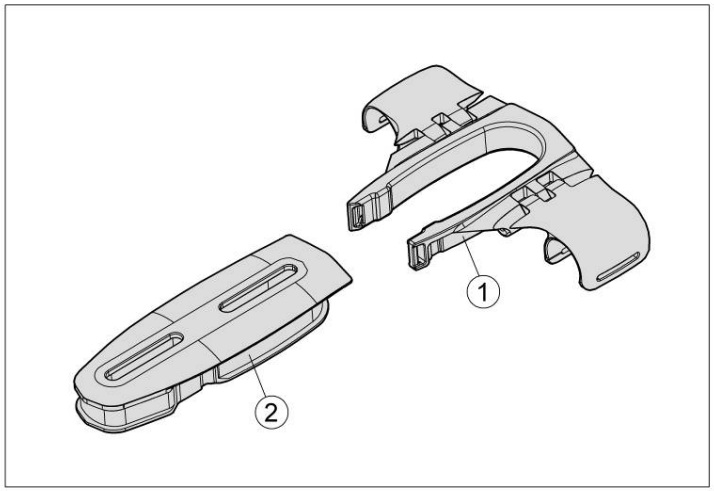

Introduction

Congratulations on your Vision product. Please read these instructions and follow them for correct use. Failure to follow the warnings and instructions could result in damage to product not covered under warranty, damage to bicycle; or cause an accident resulting in injury or death. Since specific tools and experience are necessary for proper installation, it is recommended that the product be installed by a qualified bicycle technician. FSA & Vision assumes no responsibility for damages or injury related to improperly installed components.

Warranty

Full Speed Ahead (FSA) warrants all FSA and Vision products to be free from defects in materials or workmanship for a period of two years after original purchase unless otherwise stated in the full warranty policy. The warranty is non-transferable and valid to the original purchaser of the product only. Any attempt to modify the product in any way such as drilling, grinding, and painting will void the warranty. For more information on warranty policy and instructions for completing a warranty claim, check out the Full Warranty Policy found at our website: https://www.visiontechusa.com/en/support/warranty-policy

Specification

Model Name **Metron Hydration Extension Mount**

Components

Follow the assembly order in the illustration:

① Hydration Extension Mount ② Bottle Cage Adapter

Hydration Extension Mount Installation

1. Snap one side of Hydration Extension Mount ① to one aero extension.
2. Rotate mount in to position and snap the other side on to the second aero extension (Fig. 1).

NOTICE See Fig. 1a for under-bar mounting position.

3. Slide hook-and-loop straps through strap channels (Fig. 2) and pull securely.
4. Fold hook-and-loop straps back on themselves and press to adhere.
5. Tighten the bolts to 30 kgf.cm / 3 Nm / 26 in.lbs (Fig.3a).

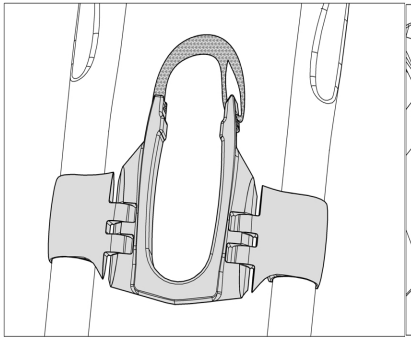

Fig. 1

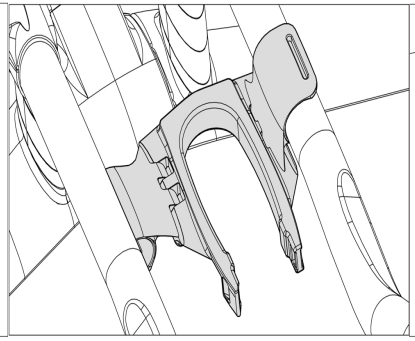

Fig. 1a

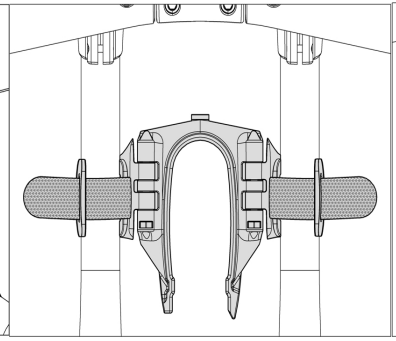

Fig. 2

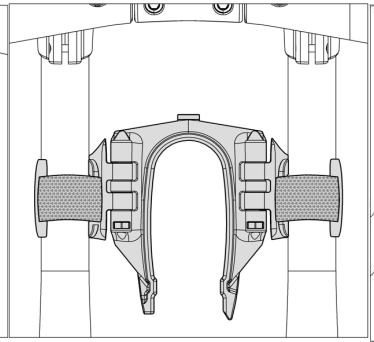

Fig. 3



Fig.3a

Bottle Cage Adapter Installation

NOTICE The Bottle Cage Adapter may be installed with mount facing forward or rearward, over or under the bar.

1. Using the provided M5 bolts and nuts, Bolt the bottle cage to the Bottle Cage Adapter ②. Leave the bolts loose (Fig. 1).
2. Slide adapter in to Hydration Extension Mount ① (Fig. 2).
3. Wrap hook-and-loop strap around the front of the adapter and through the strap channel (Fig. 3).
4. Fold strap back on itself and press firmly to secure.
5. Position bottle cage in desired location and tighten bolts.

NOTICE Bottle cage mount may be used with any standard bottle. If the Vision Hydration System Bottle is used, orient the bottle with computer mount and filler hole facing up (Fig. 4).

Fig. 1

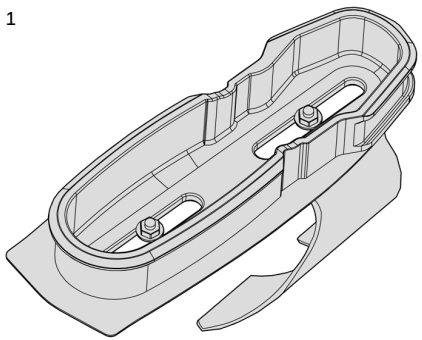

Fig. 2

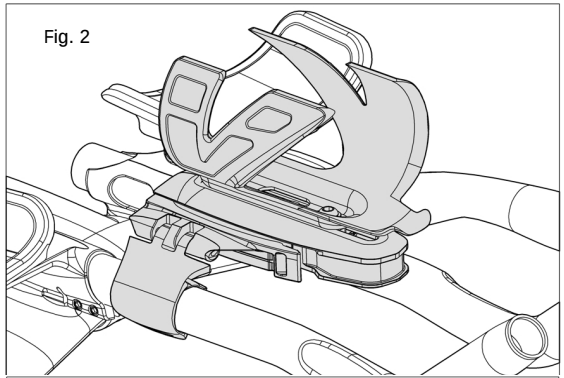

Fig. 3

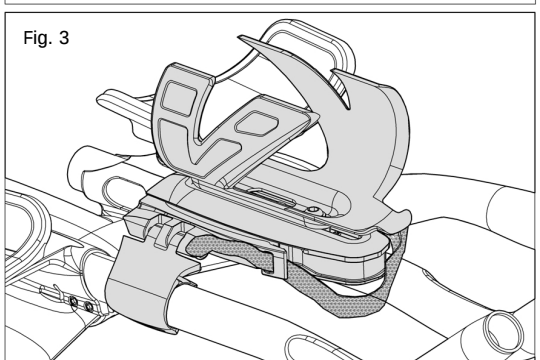

Fig. 4

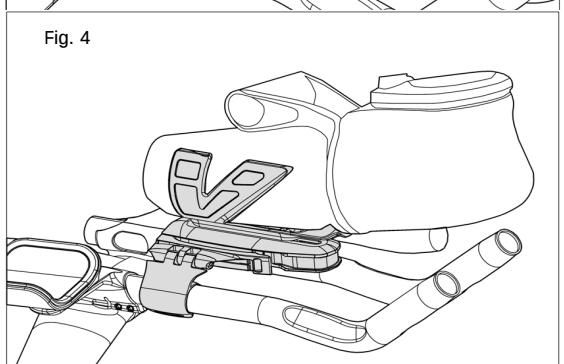

Contact

If you have questions, please visit our web site technical section: https://www.visiontechusa.com/en/support or contact:

FULL SPEED AHEAD EUROPE
VIA DEL LAVORO, 56
20874 BUSNAGO, (MB), ITALY
PH. +39 039 688 52 65

FULL SPEED AHEAD USA
12212 CYRUS WAY
MUKILTEO, WA 98275-5702
PH. +1 425 488 8653

FULL SPEED AHEAD ASIA
NO.6, WUGONG 8TH RD., WUFENG DIST.,
TAICHUNG CITY 41353
PH. +886 4 2331 9134

FULL SPEED AHEAD CHINA
ROOM A405, BUILDING 2, NO.88, BAIFU ROAD.,
KUNSHAN DEVELOPMENT ZONE
PH. +86 512 5702 2458

Notes: Specifications of product may be changed or improved for performance. Please refer to website periodically for technical updates and revised instructions.