


Vision Drink System Installation Instructions

Published – Mar, 2016. ZS182C.v0 © Full Speed Ahead

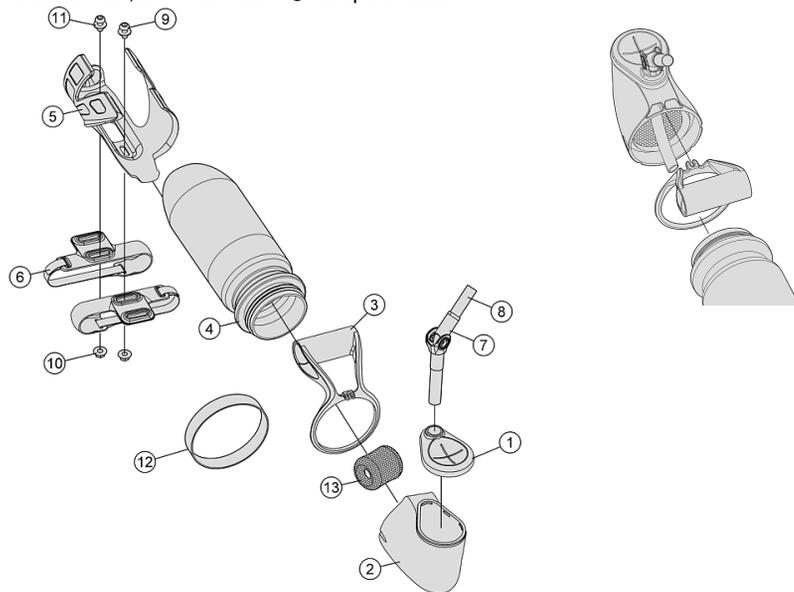

Introduction

Congratulations on your Vision product. Please read these instructions and follow them for correct use. Failure to follow the warnings and instructions could result in damage to product not covered under warranty, damage to bicycle; or cause an accident resulting in injury or death. Since specific tools and experience are necessary for proper installation, it is recommended that the product be installed by a qualified bicycle technician. FSA & Vision assumes no responsibility for damages or injury related to improperly installed components.

Warranty

Full Speed Ahead (FSA) warrants all FSA, Gravity, Vision, Metropolis and RPM products to be free from defects in materials or workmanship for a period of two years after original purchase unless otherwise stated in the full warranty policy. The warranty is non-transferable and valid to the original purchaser of the product only. Any attempt to modify the product in any way such as drilling, grinding, and painting will void the warranty. For more information on warranty policy and instructions for completing a warranty claim, check out the Full Warranty Policy found at our website: <http://www.visiontechusa.com/support/warranty-policy/>

Specification

Item Number / Model Name V0120 / Vision DS1 Drink System

Components

Follow the assembly order in the illustration:

- | | |
|----------------------------|--------------------|
| ① Filler | ⑧ Drink Hose |
| ② Aerodynamic Bottle Cap | ⑨ M5 Bolts x2 |
| ③ Universal Computer Mount | ⑩ M5 Nuts x2 |
| ④ Aerodynamic Bottle | ⑪ Washer x2 |
| ⑤ V Bottle Cage | ⑫ Rubber Seal |
| ⑥ Bottle cage Bridge x2 | ⑬ Anti-Splash Mesh |
| ⑦ Articulated Straw | |

Installation

The Vision Drink System is highly adjustable and will work with most aerobars. Double check that your aerobar is compatible before installation.

Bottle Cage Bridge:

1. Open the Bottle Cage Bridge ⑥ straps and install onto the aerobar extensions. Adjust fore-aft position of each strap to fit V Bottle Cage ⑤ then close straps firmly.

2. Install V Bottle Cage ⑤ using M5 bolts ⑨ and washer ⑪. Tighten firmly with M5 Nuts ⑩.

Aerodynamic Bottle

3. Install Universal Computer Mount ③ with Aerodynamic Bottle cap ②, place Anti-Splash Mesh ⑬ bottle cap behind Drink Hose ⑧. Tighten Bottle cap on Aerodynamic Bottle ④. To fill, pour fluids through Filler ①.

4. Install Aerodynamic Bottle in V Bottle Cage ⑤. Slide Rubber Seal ⑫ over aero extensions and stretch over bottle to secure the system.

5. Insert the Articulated Straw ⑦ to Filler and adjust the angle and length optimum position for drinking.

Service and Cleaning

The Vision Drink System bottle can and should be removed for regular cleaning.

1. Remove the Aerodynamic Bottle Cap ② and Aerodynamic Bottle ④.

2. Clean the Bottle cap and bottle with mild dish soap and water.

⚠ WARNING Heavy solvents and cleaners may damage the bottle.

3. Let the bottle cap and bottle air dry.

⚠ WARNING Do not remove Filler ① from bottle cap as it may cause damage.

WWW.VISIONTECHUSA.COM

VISION



Contact

If you have questions, please visit our web site technical section: <http://www.visiontechusa.com/support/> or contact:

Full Speed Ahead, USA
12212 Cyrus Way Mukilteo, WA 98275-5702
Tel: 1_425_488_8653 Fax: 1_425_489_1082

Full Speed Ahead, Europe
Via Del Lavoro, 56 20874 Busnago, Milan, Italy
Tel: +39_039_688_5265 Fax: +39_039_682_3336

TH INDUSTRIES / FSA Asia
NO.6, Wu-gong 8th Rd., Wufeng Dist., Taichung City 41353, Taiwan (R.O.C.)
Tel: +886_4_2331_9134 Fax: +886_4_2331_9314

Notes: Specifications of product may be changed or improved for performance. Please refer to website periodically for technical updates and revised instructions. Printed in Taiwan.

